

Thanks for using Edifier® Audio Demo Unit. Please refer to the Model Label on the packing to confirm the type: Stereo Audio Demo Unit or 5.1 Channel Audio Demo Unit, and follow the instructions hereinafter accordingly.

## Edifier® 5.1 Channel Audio Demo Unit

### Overview:

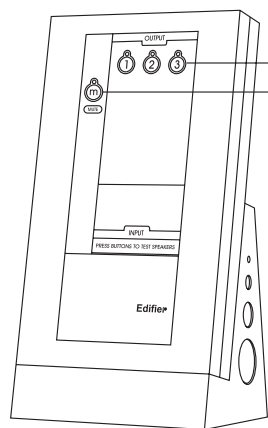


Diagram 1

1. Output selecting button
  2. Mute control
  3. Power input (AC~12V)
  4. Audio input port
- Indicator beside each button represents system status.

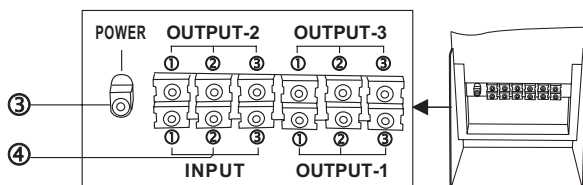


Diagram 2

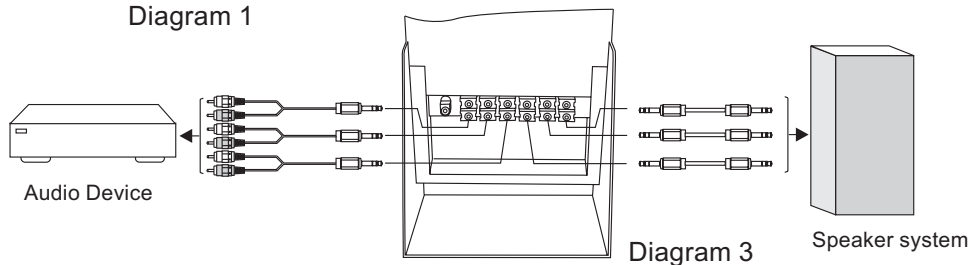


Diagram 3

### Operating instructions:

1. Connecting the audio device: Connect the Demo input to the audio device (e.g. PC sound card, DVD player and etc.) as instructed in Diagram 3, and connect the Demo output to the speaker, a maximum of three 5.1 channel speakers at one time.
2. Connecting the system to AC mains: Plug the power adapter to ac socket and the output to Demo unit as defined in Diagram 2. The defaulted status is on Mute and the indicator flashes.
3. Playing(performance test): Press Mute button to change the status to play. When power switched on, No. 1 output is defaulted. Choose the speakers by pressing relative buttons. Press Mute button will switch the system status between mute and play.

## Edifier® Stereo Audio Demo Unit

### Overview:

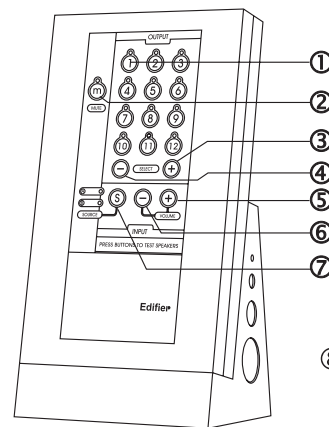


Diagram 1

1. Output selecting button
  2. Mute control
  3. Output channel switch (+)
  4. Output channel switch (-)
  5. Volume up (+)
  6. Volume down (-)
  7. Input selecting button
  8. Power input (AC~12V)
- Indicator beside each button represents system status.

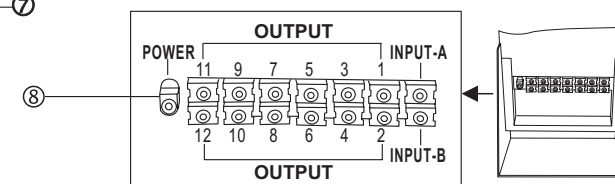


Diagram 2

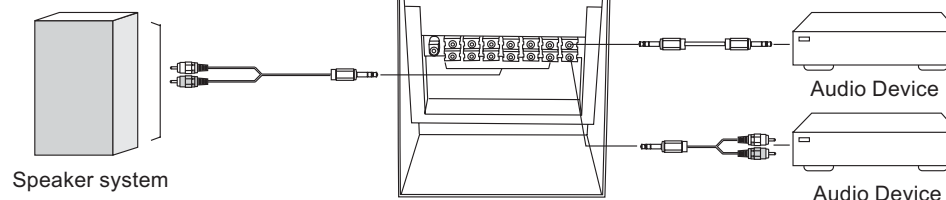


Diagram 3

### Operating instructions:

1. Connecting the audio device: Connect the Demo input to the audio device (e.g. PC sound card, VCD player and etc.) as instructed in Diagram 3, at most 2 devices at one time; connect the Demo output to speakers with a maximum of 12 speakers at one time.
2. Connecting the system to AC mains: Plug the power adapter to ac socket and the output to Demo unit as shown in Diagram 2. The defaulted status is on Mute and the mute indicator is activated.
3. Playing (performance test): Press Mute button to change the system status to play. When power switched on, No. 1 output is defaulted. Choose the tested speakers by pressing relative buttons. Press input selecting buttons to switch between the two audio devices. Press Mute button will switch system status between mute and play.